

Note:

1. Question 1 is Compulsory
2. Solve any three from remaining five
3. Figures to right indicate full marks
4. Assume suitable data if necessary

Q.1 Attempt any **four**

20

- a) Write element matrix equation in the following fields explaining each term:
 - i. 1D steady state, heat transfer by conduction
 - ii. Torsion Analysis
- b) Prove that linear triangular element is CST element.
- c) Explain different types of Boundary conditions with examples.
- d) Explain plane stress and plane strain conditions with examples.
- e) What do you mean by consistent mass matrix and lumped mass matrix. Give suitable mathematical expression?

Q.2

- a) Solve the following differential equation using Method of least square and Galerkin method.


10

$$\frac{d^2y}{dx^2} - 10x^2 = 5; 0 \leq y \leq 1; y(0) = 0, y(1) = 0$$

Compare answer with exact solution at x = 0.5

- b) Find the displacement at nodes and stresses over each element.

10

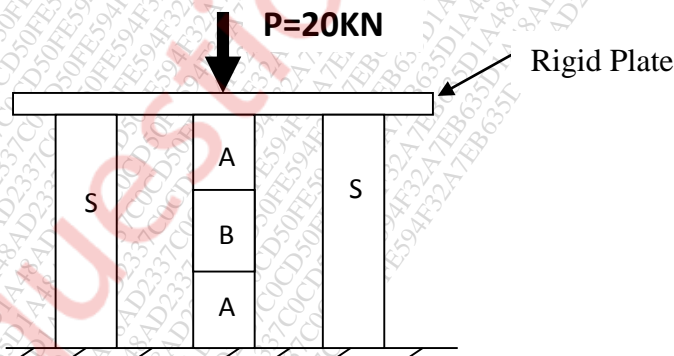

PROPERTIES	STEEL (S)	ALUMINIUM (A)	BRASS (B)
AREA, mm ²	200	370	370
E, N/mm ²	2x 10 ⁵	7x 10 ⁴	8.8x 10 ⁴
Length, mm	1000	350	300

- Q.3 a) A copper fin of diameter 2 cm, length 6 cm and thermal conductivity is $100 \text{ W/m}^\circ\text{C}$ and is exposed to ambient air at 30°C with a heat transfer coefficient $25 \text{ W/m}^2^\circ\text{C}$. If one end of the fin is maintained at temperature 500°C and other end is at 200°C . Solve the following differential equation for obtaining the temperature distribution over the length of a fin. 14


$$kA \frac{d^2\theta}{dx^2} - hp\theta = 0$$

$\theta = \text{Temperature difference} = T_x - T_a$.


Use Rayleigh-Ritz method, mapped over general element, taking Lagrange's linear shape functions and three linear elements.

Write all the steps clearly. Compare your answer with exact at $x = 2.4 \text{ cm}$


- b) For the iso parametric quadrilateral element shown in figure. Determine Cartesian coordinates of point P which has local coordinates $(\xi, \eta) = (0.57735, 0.57735)$. 6

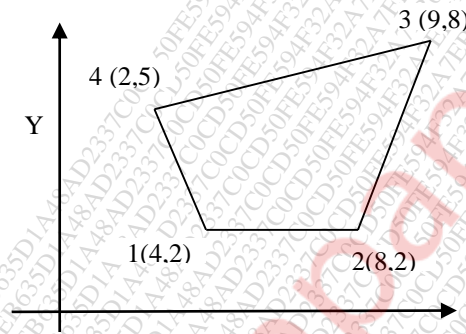


- Q.4 a) Compute the stress developed in the members of the truss shown in figure. $E = 200 \text{ GPa}$. Area of the each member is 200 mm^2 . 10

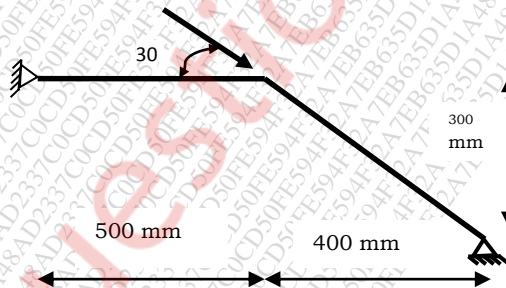


- b) The nodal coordinate of the triangular element are as shown in figure. Take the nodal displacement vector $Q^T = [2.0, 1.0, 3.0, 2.0, 5.0, 3.0]$ in mm. Obtain the displacement at the interior point P whose x and y coordinate is (1.5). 10

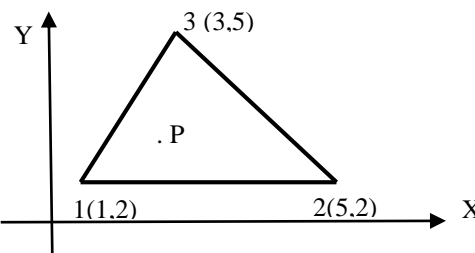

- Q.5 a) Evaluate the natural frequencies for the bar with varying cross sections **10**
 shown in figure. $L = 200$ mm, $E = 200$ GPa and $\rho = 8000$ kg/m³.
 Consider two elements of equal lengths.

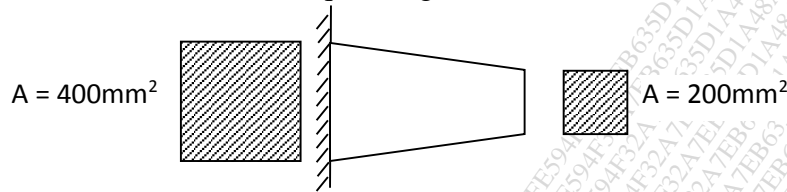

- b) Quadrilateral element is shown in figure. **10**
 The temperatures at the nodes are $T_1=100^\circ\text{C}$, $T_2=60^\circ\text{C}$, $T_3=50^\circ\text{C}$ and $T_4=90^\circ\text{C}$ respectively. Determine the temperature at a point P (2.5, 2.5)




- Q.6 a) A CST element is shown in figure. The modulus of elasticity and **12**
 Poisson's ratio for plate material are 70×10^3 N/mm² and 0.3 respectively. Upon loading of the plate, the nodal deflections were found to be in x and y direction respectively as

$u_1 = 0.01$ mm and $v_1 = -0.04$ mm, $u_2 = 0.03$ mm and $v_2 = 0.02$ mm, $u_3 = -0.02$ mm and $v_3 = -0.04$ mm.

Determine :

- i. The Jacobian for (x,y)-(ξ,η) transformation
- ii. The strain-displacement relation matrix
- iii. The stress in plate

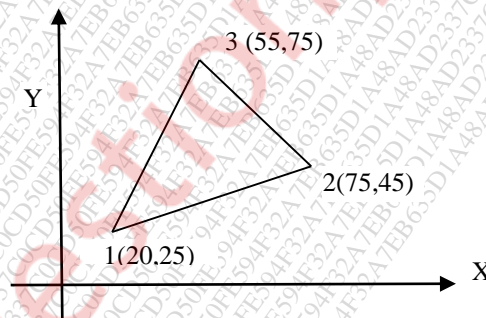

- b) Explain Convergence criteria. What do you understand by h & p method of Finite Element Analysis?

08