

(03 HOURS)

TOTAL MARKS: 80

- Instructions :** (1). Question No .1 is compulsory
 (2) Answer any **three questions** from the remaining questions.
 (3) Each full question carries **20** marks.
 (4) Assume suitable data, if needed and state it clearly.

- Q.1 Attempt any four
- Enlist in detail classifications of engineering materials. (05M)
 - What is the effect of 'Bulking of sand & Water absorption of CA on the concrete mix proportioning. (05M)
 - State the elastic properties of hardened concrete and explain any one of them in brief. (05M)
 - Explain defects in timber due to seasoning with neat sketch. (05M)
 - Draw Queen closer & King closer sketches with dimensions in case of standard brick. (05M)
 - Which field tests are conduct in the field on cement? (05M)
- Q.2
- Which IS code is required to perform compressive strength test on burnt clay brick? Explain step by step procedure to determine compressive strength of brick in the lab as per IS code. (10M)
 - Which IS code is required to perform compaction factor test? Calculate how much quantities of ingredients of concrete in 'Kg.' are required to perform this test in the lab? If the nominal mix proportions for M20 grade of concrete by ratio are 0.6 : 1 : 1.67 : 3.33. Take internal dimensions of the upper hopper as , top diameter = 254 mm, bottom diameter = 127 mm & height = 279 mm and also take density of concrete = 2350 Kg/m³. (10M)
- Q.3
- State the physical properties of OPC as per IS code? Explain in brief Standard Consistency of cement and give applications of it. (06M)
 - What are the various applications of cement mortar? (04M)
 - Explain in-detail, how will you decide dosage of chemical WRA's to enhance the properties of concrete by reducing W/C ratio of the mix. Plot graph of it. (10M)
- Q.4
- Describe English bond in case of single brick wall in brief with labeled sketches. (10M)
 - Enlist the various types of pointing of masonry work and explain any one of them with sketch. (06M)
 - Define cladding. Explain 'Attached system' of installation method of cladding. (04M)
- Q.5
- Design M25 grade of concrete for flexure in accordance with IS 10262, for the following data: (12M)

| | |
|--|---|
| <p>Design Parameters : $f_{ck} = 25 \text{ MPa}$ $MSA = 20 \text{ mm}$ Shape of CA : Angular Degree of Workability : 0.78 of CF. Degree of Quality Control : Very good Degree of Exposure : Moderate.</p> | <p>Data On Material : Cement used : OPC. Specific Gravity of Cement : 3.15 Specific Gravity of FA : 2.65 Specific Gravity of CA : 2.71 CA :20 mm & 10 mm size in 60:40 ratio. FA (Sand) : Confirming to zone-I (08M)</p> |
|--|---|
 - Explain the Wedging method of quarrying of stone with neat labeled sketch. (10M)

- Q.6 a) Explain with neat labeled sketch “Couple roof”. (05M)
 b) Explain “Marble Flooring”. (05M)
 c) Draw a neat labeled sketch of D.P.C. treatment for ground flooring.

Data For Q. 5 a)
Data for Concrete Mix Design from Indian Standard Codes

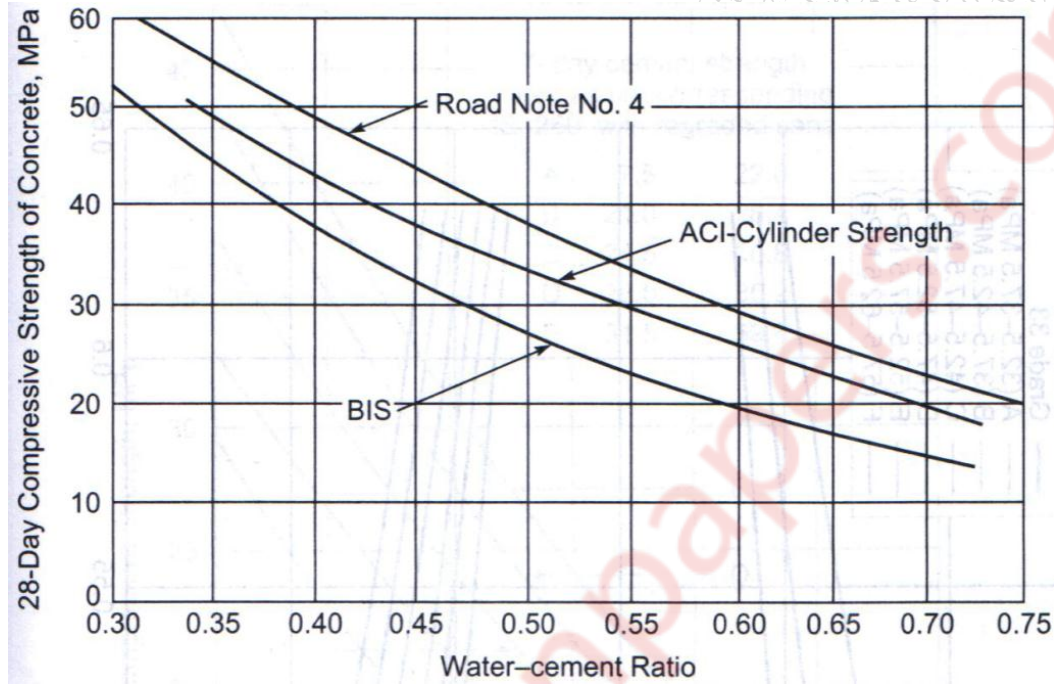


Table 1: Values of ‘k’ OR ‘t’

| Percentage of results below the characteristics strength | Values of ‘k’ OR ‘t’ |
|--|----------------------|
| 50 | 0 |
| 16 | 1.00 |
| 10 | 1.28 |
| 5 | 1.65 |
| 2.5 | 1.96 |
| 1 | 2.33 |
| 0.5 | 2.58 |
| 0.0 | Infinity |

Table 2 : Suggested Values of Standard Deviation

| Grade of Concrete | Standard deviation for different degree of control in N/mm ² | | |
|-------------------|---|------|------|
| | Very good | Good | Fair |
| M10 | 2.0 | 2.3 | 3.3 |
| M15 | 2.5 | 3.5 | 4.5 |
| M20 | 3.6 | 4.6 | 5.6 |
| M25 | 4.3 | 5.3 | 6.3 |
| M30 | 5.0 | 6.0 | 7.0 |
| M35 | 5.3 | 6.3 | 7.3 |
| M40 | 5.6 | 6.6 | 7.6 |
| M45 | 6.0 | 7.0 | 8.0 |
| M50 | 6.4 | 7.4 | 8.4 |
| M55 | 6.7 | 7.7 | 8.7 |
| M60 | 6.8 | 7.8 | 8.8 |

Table 3 : Approximate Air Content

| Maximum size of aggregate (mm) | Percentage of Entrapped air (%) |
|--------------------------------|---------------------------------|
| 10 | 3.0 |
| 20 | 2.0 |
| 40 | 1.0 |

Table 4: Minimum cement content, maximum water-cement ratio & minimum concrete grade (20 mm nominal max. size of aggregates)

| Exposure | Reinforced Concrete | | |
|-------------|--|------------------------------|---------------------|
| | Min. cement content (kg/m ³) | Max. free water-cement ratio | Min. concrete grade |
| Mild | 300 | 0.55 | M20 |
| Moderate | 300 | 0.50 | M25 |
| Severe | 320 | 0.45 | M30 |
| Very Severe | 340 | 0.45 | M35 |
| Extreme | 360 | 0.40 | M40 |

Table 5: Approximate sand & water content per m³ of concrete*

| Grade | Nominal size of | Water content | Sand as % of | Remarks |
|------------|-----------------|---------------|--------------|---|
| Up to M35 | 10 | 208 | 40 | Sand zone II, water-cement ratio = 0.6, |
| | 20 | 186 | 35 | |
| | 40 | 163 | 30 | |
| Beyond M35 | 10 | 200 | 28 | Compaction Factor = 0.8 |
| | 20 | 180 | 25 | |

* These values apply to the conditions given in the **remarks** column. For other conditions, corrections are to be applied as per **Table 6**.

Table 6: Corrections to the values given in Table 5, to be applied for conditions other than those given in the remarks column of Table 5.

| Change in conditions other than those given in Table 5 | Correction for water content | Correction for sand content in total aggregates |
|--|------------------------------|--|
| Sand conforming to zone I, III or IV | 0 | +1.5 for zone I, - 1.5 for zone III, - 3.0 for zone IV |
| Increase or decrease in compacting factor value by 0.1 (for workability) | ±3% | 0 |
| Each 0.05 increase or decrease in water-cement ratio | 0 | ±1% |
| For rounded aggregates (gravel) | - 15 kg/m ³ | - 7% |